

PERC MONO CRYSTALLINE MODULE


DM320-M158-60BK

60 x 6" / 305-320W

Wattages :

305 / 310

315 / 320

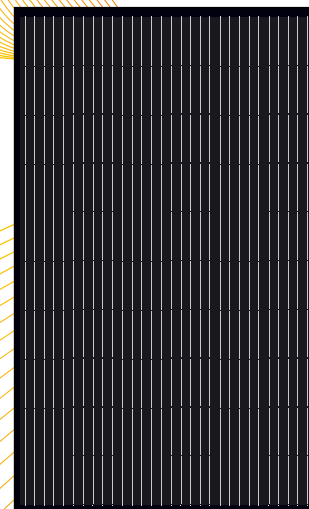

Technology

High module conversion efficiency through superior manufacturing technology



PID Free



Power-Positive Tolerance

Guaranteed power output(0/+3%)



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value

www.dmegcsolar.com

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output



- Our IP67 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 10 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 80.2% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400 Pa rated assembly




Electrical Specifications

* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DM305-M158-60BK	305	0/+3%	9.19	33.21	9.78	40.48	18.28%
DM310-M158-60BK	310	0/+3%	9.29	33.40	9.85	40.62	18.58%
DM315-M158-60BK	315	0/+3%	9.38	33.61	9.92	40.76	18.88%
DM320-M158-60BK	320	0/+3%	9.47	33.81	9.99	40.90	19.18%

Mechanical Data

Cell Type	DMPD5B158-223
Cell Arrangement	60(6x10)
Module Structure	Glass/ EVA / Backsheet(black)
Glass Thickness	3.2mm
Application Class	Class A at IEC 61730
Junction Box Rating	IP 67
Cables	1000mm/4mm ²
Connector Type	MC4 Compatible
Fire Rating Class	Class C

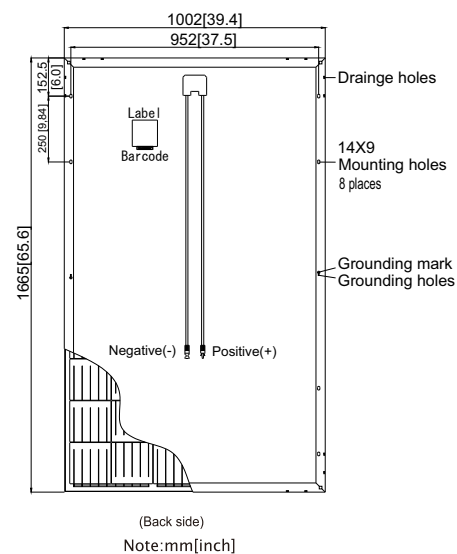

Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa / Wind 2400Pa
Maximum System Voltage	600V DC(UL) / 1000V DC(IEC)
Maximum Series Fuse Rating	15A
Number of Diodes	3


Packaging

Module Dimensions	1665x1002x35mm
Weight	18.6kg
Pallet Dimensions	1715x1130x1140mm
Container	40' HQ
Pieces per Pallet	31
Pallets per Container	28
Pieces per Container	868
Gross Weight per Pallet	620kg
Gross Weight per Container	17360kg

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Isc	+0.06%/°C
Temperature Coefficient of Voc	-0.300%/°C
Temperature Coefficient of Pmax	-0.390%/°C

Current-Voltage&Power-Voltage Curve(320W)

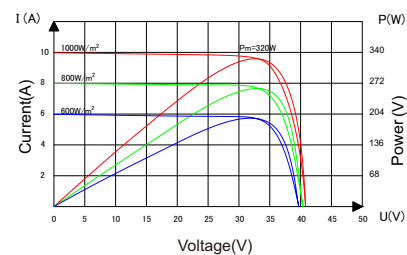

Temperature Dependence of Isc, Voc, Pmax

